

## DALI WALL PLATE DIMMER



**DGDALIDM**  
for on/off switching  
and dimming control




**DGDALIDM8**  
for on/off switching,  
dimming and colour  
temperature control

### PRODUCT DETAILS:

- Simple on/off switching and dimming control for DALI light fixtures
- Configurable minimum brightness setting
- Colour temperature control (requires DGDALIDM8 model and DALI Type 8 LED drivers)
- Up to four DALI Wall Plate Dimmers can be connected in parallel on a DALI Line for multi-point control
- Built in 125mA DALI power supply (mains connection required)
- Able to control up to 50 DALI drivers on a single DALI line
- Only mains connection (active and neutral) and DALI connection (DA/DA) required
- Can be powered by external DALI power supply connected to DALI line (no mains connection required)
- No external DALI power supply or other equipment is required
- No programming of the device or DALI drivers is required
- Warranty: 2 year


### APPLICATIONS:

Wall mount, Internal  
Commercial offices, Meeting rooms, Board rooms, Executive offices,  
School classrooms, Hospital wards

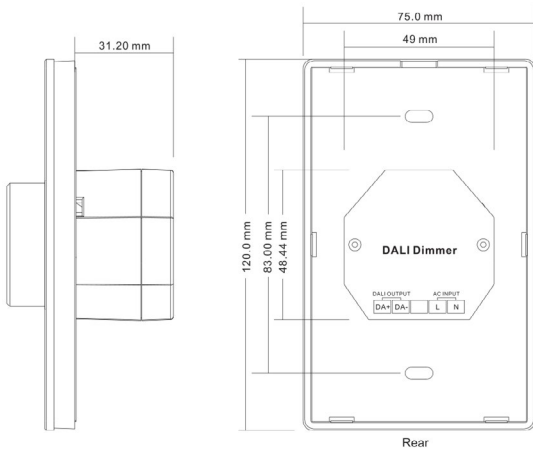

### TYPICAL CONNECTIONS

Up to four Diginet DALI Wall Plate Dimmers can be connected to the same DALI line. Connections can either be to (a) both Mains and DALI, or (b) DALI connections only.

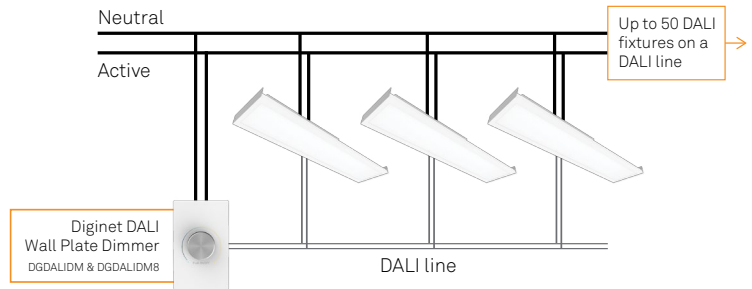

CODE	DESCRIPTION
DGDALIDM	DALI WALL PLATE ON/OFF SWITCHING DIMMING CONTROL
DGDALIDM8	DALI WALL PLATE ON/OFF SWITCHING DIMMING CCT CONTROL