

**FEATURES**

- 7 year warranty, Rated life: L70 F10 70,000 hours
- CRI 80+ standard, CRI 90+ available on request
- Rated colour tolerance: 3 Step McAdam Ellipse
- Specifically engineered thermal management
- Highly configurable
- Anodised, White, Black standard, custom colours available on request
- CCT: 3,000K & 4,000K
- Control options: Fixed Output, DSI, Dali, DMX Compatible, 0-10v, Optional Ripple free drivers, Constant light output, Switch Dim, Ambient Light / Motion Sensors
- Optics: PlexiLED, PolyLED
- Accessories: Bends lit and unlit (Corner90°, cross90°, Tee90°), Emergency backup, Emergency LED spitfires, LED Downlights
- Mounting Options: Standard wire suspensions, Rod suspensions, Custom wall brackets, Custom joinery details




**AUS 160 GS LED BEAM**

Aluminium extrusions with a variety of length alternatives, lamp, mounting and component options.


**APPLICATIONS**

Ideal for indoor architectural and commercial applications.

**Performance**

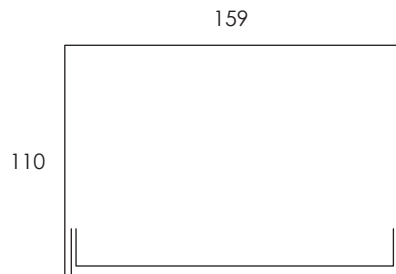

Overall 159mmW x 110mmH  
7kg/m  
Luminaire length - up to 6 metres without joins  
Incremental length - 70mm boards

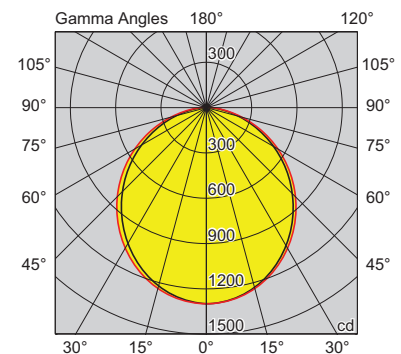

Note: The below output values are 'delivered' lumens. This takes into consideration the transmission losses in the diffuser along with thermal regulation. These values are more relevant than 'board' lumens as fitting efficiency is accounted for.

DELIVERED LUMENS PER METRE			POWER PER METRE	
mA	HE LUMENS	HO LUMENS	HE POWER	HO POWER
250 mA	2672	5452	39	69
275 mA	2913	5942	43	75
300 mA	3090	6304	46	80
350 mA	3508	7156	52	91