



FEATURES

- Rated average life of 35,000 hours*, 6000K
- An energy efficient weather resistant IP65 system
- Low glare, polycarbonate opal prismatic diffuser
- Stylish high gloss black polycarbonate base
- Integral constant current driver
- Optional integral motion sensor
- The hidden sensor switches off the luminaire when there is no movement
- The sensor version has an adjustable time out period



JULUXLED2

The Julux LED2 and Julux LED2-MS have been designed to meet commercial spaces.

APPLICATIONS

Interior or covered residential , commercial services, health care, apartments and retail design applications.

Performance

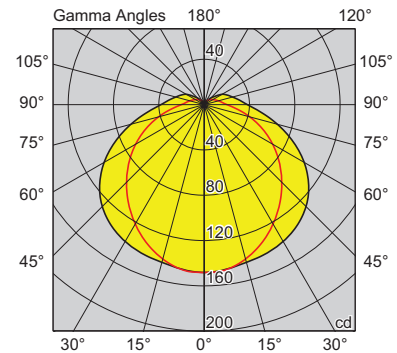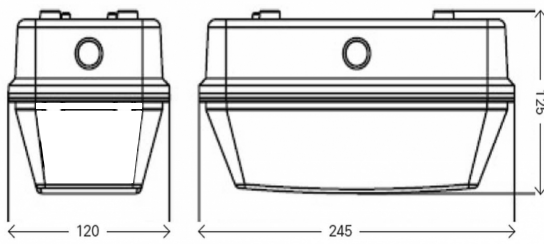

JULUXLED2 9W 6K

Product Code	Version	Wattage	CCT	Lumens	Dim (mm)	Mass
JULUXLED2	9W LED 6K	9W	6,000K	634lm	245 x 125 x 120	0.8kg
JULUXLED2-MS	9W LED Sensor	9W	6,000K	634lm	245 x 125 x 120	0.8kg

Note: The above codes are for standard products only. Please refer to your local representative for more options. Contact your local representative for photometric information or choose to submit an enquiry for more information.