



FEATURES

- Recessed hole diam.70 mm. Recessed thickness 1-20 mm.
- Steel spring
- Die-cast aluminium body and ABS frame/ring
- Base of body coated with epoxy powder paint with special treatment for outdoor use
- Polycarbonate metallized reflector
- Silicon rubber gaskets
- Clear tempered glass
- Nichel plated brass cable gland PG7
- 350mA dc
- Available in 25° and 40° beam.
- Insulation class 3
- Available in White, Black and Grey


CIELO COB

Round ceiling recessed lights.

APPLICATIONS

- Commercial buildings
- Apartments
- Residential areas

Performance

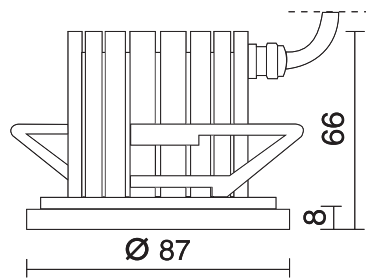

Product Code	Version	Wattage	CCT	Lumens	Dim (mm)	Mass
E8140-MLBC25	CIELO 25D 1X6.6W 3000K White	1X6.6W	3,000K	540lm	Ø87 x 74	0.4kg
E8140-MLBN25	CIELO 25D 1X6.6W 4000K White	1X6.6W	4,000K	460lm	Ø87 x 74	0.4kg
E8140-MLBC40	CIELO 40D 1X6.6W 3000K White	1X6.6W	3,000K	540lm	Ø87 x 74	0.4kg
E8140-MLBN40	CIELO 40D 1X6.6W 4000K White	1X6.6W	4000	460lm	Ø87 x 74	0.4kg
E8141-MLBC25	CIELO 25D 1X6.6W 3000K Black	1X6.6W	3,000K	540lm	Ø87 x 74	0.4kg
E8141-MLBN25	CIELO 25D 1X6.6W 4000K Black	1X6.6W	4,000K	460lm	Ø87 x 74	0.4kg
E8141-MLBC40	CIELO 40D 1X6.6W 3000K Black	1X6.6W	3,000K	540lm	Ø87 x 74	0.4kg
E8141-MLBN40	CIELO 40D 1X6.6W 4000K Black	1X6.6W	4,000K	460lm	Ø87 x 74	0.4kg

Note: The above codes are for standard products only. Please refer to your local representative for more options. Contact your local representative for photometric information or choose to submit an enquiry for more information.