


## GENLED ONE RECESSED MODULE

Efficiency, visual comfort and stunning aesthetics combine in this award winning module. The low level side lit ambient panels offer a contrast to the main lighting source and create ambient to the working environment.

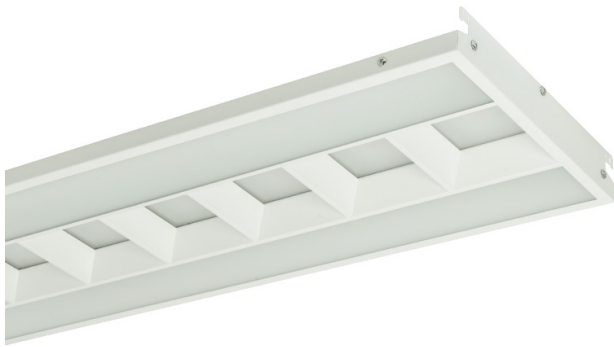

### FEATURES:



- 5 year warranty
- 50000 hrs rated life @ L90, B50
- Samsung LED technology
- Excellent lit appearance with side lit diffused panels and outstanding uniformity (UGR 19 capable)
- High quality European made TCI driver, Flicker / Ripple Free
- Efficacy of approx. 100lm/W
- Powder coated sturdy low profile steel body 60mm thickness
- Phosphate pre-treatment
- Acrylic centre and side diffuser
- IES Design Award of Excellence
- CCT 4000K

### OPTIONS :

- 1200x300 / 600x300
- Custom infill panel
- CRI>80 / CRI>90
- Non-dim, DALI, 1-10v, phase dim and push dim
- Emergency options
- Surface frames, plaster master frames and air handling trims
- Seismic restraint kit

### APPLICATIONS:

- Commercial interiors
- Schools and offices
- Healthcare applications

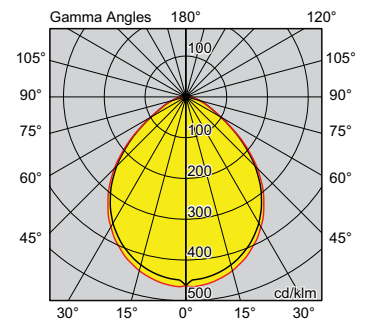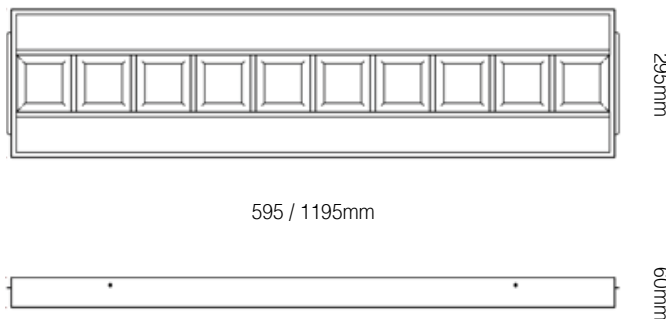

GENLED ONE 1200X300  
45W 4000K

PRODUCT CODE	VERSION	WATTAGE	CCT	CRI	DELIVERED LUMENS*	MASS
GLED/1234/9E	1200X300 30W 4000K UGR19 NON-DIM	30W	4000K	>80	2960lm <sup>^</sup>	6.0kg
GLED/1234/10E	1200X300 36W 4000K UGR19 NON-DIM	36W	4000K	>80	3450lm <sup>^</sup>	6.0kg
GLED/1234/14E	1200X300 45W 4000K UGR19 NON-DIM	45W	4000K	>80	4340lm	6.0kg
GLED/0634/3E	600X300 12W 4000K UGR19 NON-DIM	12W	4000K	>80	1120lm	3.0kg
GLED/0634/5E	600X300 17W 4000K UGR19 NON-DIM	17W	4000K	>80	1600lm <sup>^</sup>	3.0kg
GLED/0634/7E	600X300 24W 4000K UGR19 NON-DIM	24W	4000K	>80	2200lm	3.0kg
GLED/1234/9U	1200X300 30W 4000K UGR19 DALI	30W	4000K	>80	2960lm <sup>^</sup>	6.0kg
GLED/1234/10U	1200X300 36W 4000K UGR19 DALI	36W	4000K	>80	3450lm <sup>^</sup>	6.0kg
GLED/1234/14U	1200X300 45W 4000K UGR19 DALI	45W	4000K	>80	4340lm	6.0kg
GLED/0634/3U	600X300 12W 4000K UGR19 DALI	12W	4000K	>80	1120lm	3.0kg
GLED/0634/5U	600X300 17W 4000K UGR19 DALI	17W	4000K	>80	1600lm <sup>^</sup>	3.0kg
GLED/0634/7U	600X300 24W 4000K UGR19 DALI	24W	4000K	>80	2200lm	3.0kg

\*Delivered lumens from luminaire, including thermal, electrical and optic losses. ^Figures are interpolated / extrapolated from data at other versions.