


GENLED ONE RECESSED MODULE

Efficiency, visual comfort and stunning aesthetics combine in this award winning module. The low level side lit ambient panels offer a contrast to the main lighting source and create ambient to the working environment.

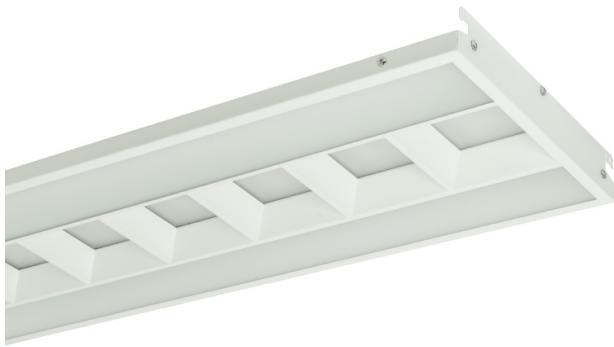

FEATURES:



- 5 year warranty
- 50000 hrs hrs rated life @ L90, B50
- Samsung LED technology
- Excellent lit appearance with side lit diffused panels and outstanding uniformity (UGR 19 capable)
- High quality European made TCI driver, Flicker / Ripple Free
- Efficacy of approx. 100lm/W
- Powder coated sturdy low profile steel body 60mm thickness
- Phosphate pre-treatment
- Acrylic centre and side diffuser
- IES Design Award of Excellence
- CCT 4000K

OPTIONS :

- 1200x300 / 600x300
- Custom infill panel
- CRI>80 / CRI>90
- Non-dim, DALI, 1-10v, phase dim and push dim
- Emergency options
- Surface frames, plaster master frames and air handling trims
- Seismic restraint kit

APPLICATIONS:

- Commercial interiors
- Schools and offices
- Healthcare applications

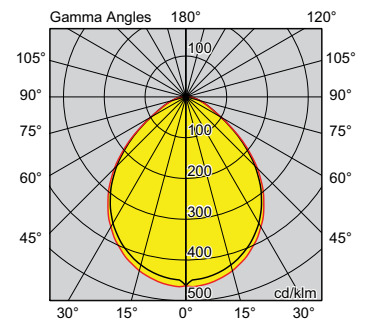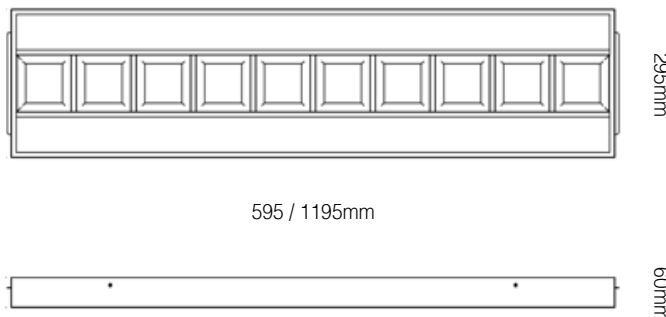

GENLED ONE 1200X300
45W 4000K

| PRODUCT CODE | VERSION | WATTAGE | CCT | CRI | DELIVERED LUMENS* | MASS |
|---------------|----------------------------------|---------|-------|-----|---------------------|-------|
| GLED/1234/9E | 1200X300 30W 4000K UGR19 NON-DIM | 30W | 4000K | >80 | 2960lm [^] | 6.0kg |
| GLED/1234/10E | 1200X300 36W 4000K UGR19 NON-DIM | 36W | 4000K | >80 | 3450lm [^] | 6.0kg |
| GLED/1234/14E | 1200X300 45W 4000K UGR19 NON-DIM | 45W | 4000K | >80 | 4340lm | 6.0kg |
| GLED/0634/3E | 600X300 12W 4000K UGR19 NON-DIM | 12W | 4000K | >80 | 1120lm | 3.0kg |
| GLED/0634/5E | 600X300 17W 4000K UGR19 NON-DIM | 17W | 4000K | >80 | 1600lm [^] | 3.0kg |
| GLED/0634/7E | 600X300 24W 4000K UGR19 NON-DIM | 24W | 4000K | >80 | 2200lm | 3.0kg |
| GLED/1234/9U | 1200X300 30W 4000K UGR19 DALI | 30W | 4000K | >80 | 2960lm [^] | 6.0kg |
| GLED/1234/10U | 1200X300 36W 4000K UGR19 DALI | 36W | 4000K | >80 | 3450lm [^] | 6.0kg |
| GLED/1234/14U | 1200X300 45W 4000K UGR19 DALI | 45W | 4000K | >80 | 4340lm | 6.0kg |
| GLED/0634/3U | 600X300 12W 4000K UGR19 DALI | 12W | 4000K | >80 | 1120lm | 3.0kg |
| GLED/0634/5U | 600X300 17W 4000K UGR19 DALI | 17W | 4000K | >80 | 1600lm [^] | 3.0kg |
| GLED/0634/7U | 600X300 24W 4000K UGR19 DALI | 24W | 4000K | >80 | 2200lm | 3.0kg |

*Delivered lumens from luminaire, including thermal, electrical and optic losses. ^Figures are interpolated / extrapolated from data at other versions.