

CANOPY LIGHT LOWBAY



PRODUCT DETAILS:



- Rated life: L80/B10 50000hrs
- LED: CCT 4000K, CRI>80, 5 SDCM
- Beam angle: Symmetrical, 120°
- Driver: MeanWell, Integral, Non-Dim
- Rating: IP65, IK10, Class I
- Operating temperature: -40°C to +50°C
- Housing: ADC12 Die-cast aluminium
- Finishing: White RAL9016, Powder coating
- Diffuser: Polycarbonate, Frosted, Reeded
- Connection: 0.3m flying lead, Center cable entry
- Warranty: 5 year

MADE TO ORDER OPTIONS:

DALI/PUSH/1-10V dimming, Rod suspended

APPLICATIONS:

Surface mount, Internal, External
Food processing areas, Service station canopies, Retail spaces,
Manufacturing facilities, Cold storage and Refrigerated warehouses

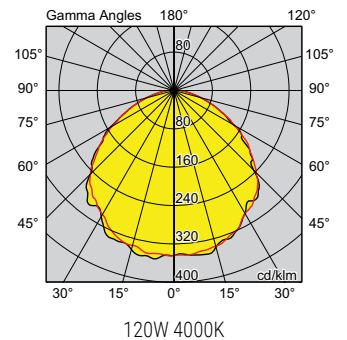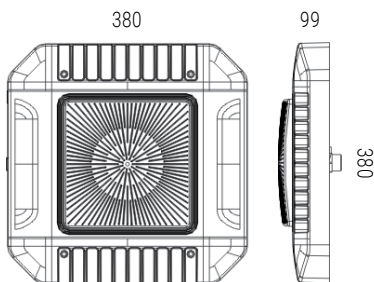

CODE	DESCRIPTION	POWER [~]	LUMENS [*]	EFFICACY	WEIGHT
PCNPY120W4K	120W 4000K CRI>80 NON-DIM	120W	17641lm	147lm/W	5.8kg

*Delivered lumens from luminaire, including thermal, electrical and optic losses. [~]Tested system powers from luminaire.