






## DALI ECO LED G5 HIGHBAY

### PRODUCT DETAILS:

- Size: Ø328mm
- Rated life: L70/B50 50000hrs
- LED: CCT5000K, CRI>80, 7 SDCM
- Beam angle: Symmetrical 115°
- Driver: Integral, DALI dimming
- Rating: IP65, IK08, Class I
- Operating temperature: -30°C to +50°C
- Housing: Die-cast LM6 aluminium (low copper content <0.1%)
- Finishing: Black, Powder coating
- Diffuser/Lens: Polycarbonate, Clear
- Connection: 1.7m Flex & Plug, DALI connector, Safety wire
- Warranty: 5 year
- Accessory: Surface mount kit, Polycarbonate reflector, Aluminium reflector, Aluminium dust cover

### APPLICATIONS:

Suspended, Surface mount, Internal, External  
Warehousing, Industrial facilities, Workshops, Retail environments,  
Cold storage, Sports facilities

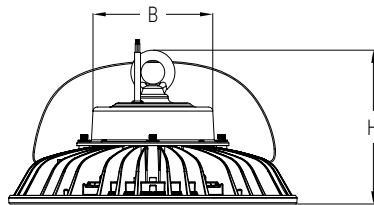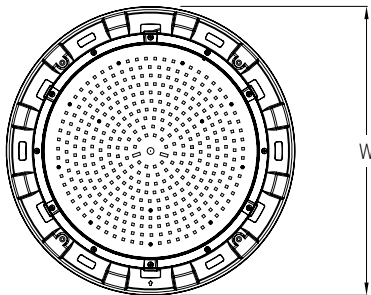

VERSION	W (MM)	B (MM)	H (MM)
ECOHB200W850A	328	151	171

CODE	DESCRIPTION	POWER <sup>~</sup>	LUMENS <sup>*</sup>	EFFICACY	WEIGHT
ECOHB200W850A	190W 5000K CRI>80 DALI	190W	29978lm	158lm/W	3.7kg

\*Delivered lumens from luminaire, including thermal, electrical and optic losses. <sup>~</sup>Tested system powers from luminaire.