

DLED G3 RECESSED MODULE

PRODUCT DETAILS:


- Size: 600x600mm, 1200x300mm, 1200x600mm
- Rated life: L90 54000hrs
- LED: CCT 4000K, CRI>90, 3 SDCM
- Glare control: UGR19 capable
- Driver: TCI, Remote, Non-Dim/DALI dimming, Flicker-Free design
- Rating: IP54 from below/IP40 from above, Class II
- Operating temperature: 0°C to +40°C
- Housing: Cold rolled steel
- Finishing: White RAL9003, Powder coating
- Diffuser/Lens: PMMA, Frosted, Prismatic
- Connection: 1.5m Flex & Plug
- Compliant: Cyanosis
- Warranty: 5 year

MADE TO ORDER OPTIONS (lead time and MOQ may apply):


Anti-Microbial powder coating, Other dimming options, Other lumen packages, Emergency, Custom infill panels, Surface mount frames, Plaster recessed frames, Air handling trims

APPLICATIONS:

Recessed, Internal
Offices, Schools, Healthcare applications, Commercial interiors

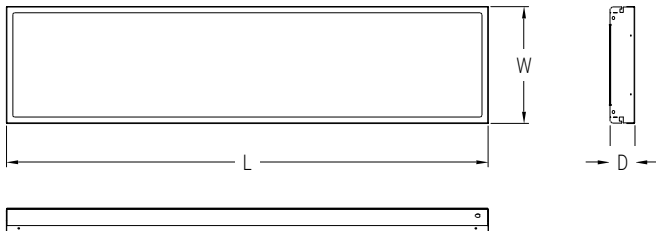

VERSION	L (MM)	W (MM)	D (MM)
600X600	590	590	62
1200X300	1190	290	62
1200X600	1190	590	62

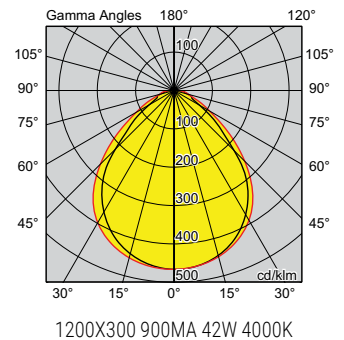

CODE	DESCRIPTION	POWER [~]	LUMENS [*]	EFFICACY	WEIGHT
DLED3B066495	600X600 500mA 23W 4000K CRI>90 UGR 19 NON-DIM	23W	2533lm	110lm/W	4.5kg
DLED3B066497	600X600 700mA 32W 4000K CRI>90 UGR 19 NON-DIM	32W	3502 lm	109lm/W	4.5kg
DLED3B066499	600X600 900mA 41W 4000K CRI>90 UGR 19 NON-DIM	41W	4435lm	108lm/W	4.5kg
DLED3B123495	1200X300 500mA 23W 4000K CRI>90 UGR 19 NON-DIM	23W	2533lm	110lm/W	4.8kg
DLED3B123497	1200X300 700mA 33W 4000K CRI>90 UGR 19 NON-DIM	33W	3555lm	108lm/W	4.8kg
DLED3B123499	1200X300 900mA 42W 4000K CRI>90 UGR 19 NON-DIM	42W	4419lm	105lm/W	4.8kg
DLED3B126495	1200X600 500mA 23W 4000K CRI>90 UGR 19 NON-DIM	23W [^]	2533lm [^]	110lm/W [^]	8.0kg
DLED3B126497	1200X600 700mA 33W 4000K CRI>90 UGR 19 NON-DIM	33W [^]	3555lm [^]	108lm/W [^]	8.0kg
DLED3B126499	1200X600 900mA 42W 4000K CRI>90 UGR 19 NON-DIM	42W [^]	4419lm [^]	105lm/W [^]	8.0kg

*Delivered lumens from luminaire, including thermal, electrical and optic losses. [~]Tested system powers from luminaire.

[^]Figures are interpolated / extrapolated from data at other versions.