

## OCULED RECESSED MODULE

### PRODUCT DETAILS:


- Size: 600x300, 600x600, 1200x300
- Rated life: L70/B50 50000h
- LED: CCT 4000K, CRI>90, 3 SDCM
- Glare control: UGR 19 capable with Side-Lit ambient panels
- Driver: TCI, Remote, Non-Dim/DALI, Flicker-Free
- Rating: IP20, Class I
- Operating temperature: 0°C to +55°C
- Housing: Cold rolled steel, Extruded aluminium, Powder coating
- Colour: White, Black highlight
- Lens/Diffuser: Acrylic PMMA, Clear central lens, Microprismatic Side-Lit ambient panels
- Connection: 1.2m Flex & Plug
- Warranty: 5 year

### MADE TO ORDER OPTIONS:


Other CCTs, Other dimming options, Emergency, Custom infill panels

### APPLICATIONS:

Recessed, Internal  
Offices, Commercial interiors, Schools, Healthcare applications

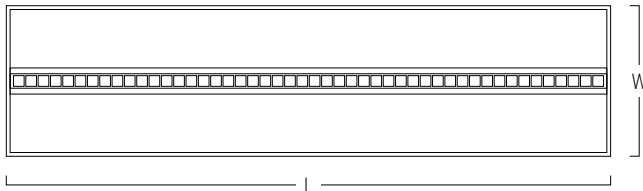

VERSION	L (MM)	W (MM)	H (MM)
600X300	290	290	50
600X600	590	590	50
1200X300	1190	290	50

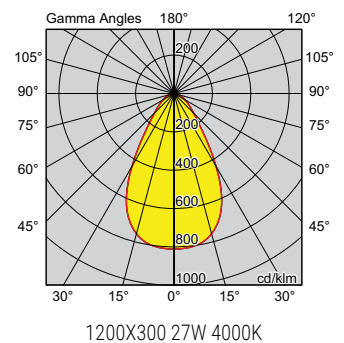

CODE	DESCRIPTION	POWER	LUMENS*	EFFICACY	WEIGHT
OCLB06349F3	600X300 350MA 4000K CRI>90 UGR 19 NON-DIM	13W	1355lm	104lm/W	1.8kg
OCLB06349D3	600X300 350MA 4000K CRI>90 UGR 19 DALI	13W	1355lm	104lm/W	1.8kg
OCLB06649F6	600X600 700MA 4000K CRI>90 UGR 19 NON-DIM	27W ^	2697lm^	100lm/W^	3.5kg
OCLB06649D6	600X600 700MA 4000K CRI>90 UGR 19 DALI	27W ^	2697lm^	100lm/W^	3.5kg
OCLB12349F6	1200X300 700MA 4000K CRI>90 UGR 19 NON-DIM	27W	2697lm	100lm/W	3.5kg
OCLB12349D6	1200X300 700MA 4000K CRI>90 UGR 19 DALI	27W	2697lm	100lm/W	3.5kg

\*Delivered lumens from luminaire, including thermal, electrical and optic losses. ^Figures are interpolated / extrapolated from data at other versions.