



## PIERLUX ECO LED G5 HIGHBAY

### PRODUCT DETAILS:




- Size: Ø295mm, Ø328mm
- Rated life: L70/B50 50000hrs at 50°C
- LED: CCT 5000K, CRI>80, 7 SDCM
- Beam angle: 115°
- Driver: Integral, 1-10V Dim, Fixed Output
- Driver: Integral, Non-Dim, Lumen Select via DIP Switch
- Rating: IP65, IK08, Class I
- Operating temperature: -20°C to +50°C
- Housing: Die-cast LM6 aluminium (low copper content <0.1%)
- Colour: Black
- Lens: Polycarbonate, Clear
- Connection: 1.7m Flex & Plug, Safety wire
- Warranty: 5 year
- Accessory: Anti-Glare aluminium reflector, Clear polycarbonate reflector, Aluminium dust cover, Surface mount kit

### MADE TO ORDER OPTIONS:

Motion/Daylight sensor, Surface mount

### APPLICATIONS:

Suspended, Surface mount, Internal, External  
Warehousing, Industrial facilities, Workshops, Retail environments,  
Cold storage, Sports facilities

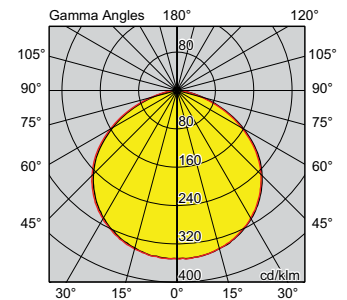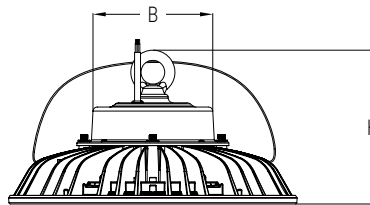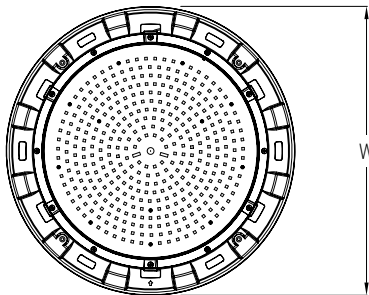

LUMEN SELECT 5000K 194W

VERSION	W (MM)	B (MM)	H (MM)
FIXED OUTPUT 120W	295	115	150
LUMEN SELECT	328	131	157

CODE	DESCRIPTION	POWER	LUMENS*	EFFICACY	WEIGHT
ECOHB120W850G5	FIXED OUTPUT 120W 5000K CRI>80 1-10V DIM	119W	19184lm	161lm/W	3.0kg
ECOHB200W850LS	LUMEN SELECT @ 100W 5000K CRI>80 NON-DIM	100W	17385lm	174lm/W	4.2kg
	LUMEN SELECT @ 150W 5000K CRI>80 NON-DIM	150W	24971lm	166lm/W	4.2kg
	LUMEN SELECT @ 170W 5000K CRI>80 NON-DIM	174W	28224lm	162lm/W	4.2kg
	LUMEN SELECT @ 200W 5000K CRI>80 NON-DIM	190W	29978lm	158lm/W	4.2kg
ECOHBG5ALREF	ANTI-GLARE ALUMINIUM REFLECTOR BEAM ANGLE: 90°				1.0kg
ECOHBG5PCREF	CLEAR POLYCARBONATE REFLECTOR BEAM ANGLE: 100°				0.6kg
ECOHBG5SMCOV	ALUMINIUM DUST COVER FOR ECOHB120W850G5				0.3kg
ECOHBG5LRCOV	ALUMINIUM DUST COVER FOR ECOHB200W850LS				0.4kg
ECOHB120BRKT	SURFACE MOUNT KIT FOR ECOHB120W850G5				0.3kg
ECOHB170200BRKT	SURFACE MOUNT KIT FOR ECOHB200W850LS				0.4kg

\*Delivered lumens from luminaire, including thermal, electrical and optic losses. \*Figures are interpolated / extrapolated from data at other versions.