

## SLENDER G3 RECESSED MODULE

### PRODUCT DETAILS:

- Size: 600x600, 1200x300, 1200x600
- Rated life: L70/B50 50000hrs
- LED: CCT 4000K, CRI>80, 4 SDCM
- Beam angle: Symmetrical, 95°
- Glare control: UGR 19 capable
- Driver: Tridonic, Remote, Non-Dim
- Rating: IP40, IK07, Class II
- Operating temperature: -20°C to +40°C
- Housing: Aluminium trim, Galvanized steel back
- Finishing: White RAL9016, Powder coating
- Diffuser: Polystyrene, Frosted, Prismatic
- Connection: 1.5m Flex & Plug
- Accessory: Complete with restraint brackets
- Warranty: 5 year





### MADE TO ORDER OPTIONS:

DALI/PUSH/1-10V dimming, Plaster master frames, Surface mount frames, Suspension Kit

### APPLICATIONS:

Recessed, Internal  
Offices, Schools, Foyers, Waiting-rooms, Commercial, Retail

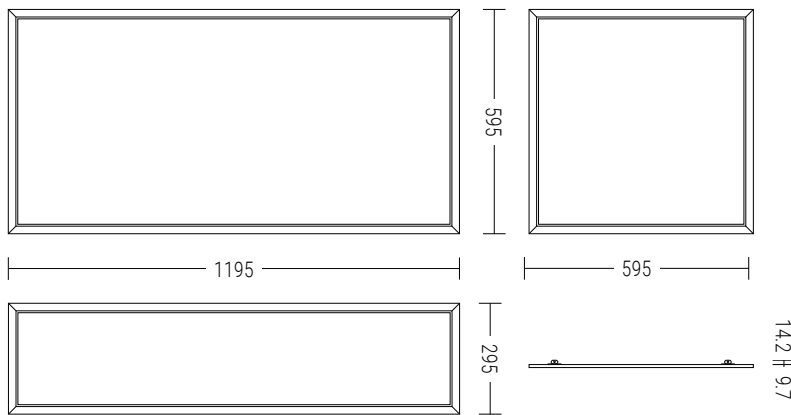

CODE	DESCRIPTION	POWER <sup>~</sup>	LUMENS <sup>*</sup>	EFFICACY	WEIGHT
SL0664KG3	600X600 34W 4000K CRI>80 UGR 19 NON-DIM	34W	3468lm	102lm/W	3.4kg
SL1234KG3	1200X300 34W 4000K CRI>80 UGR 19 NON-DIM	34W	3619lm	106lm/W	3.4kg
SL1264KG3	1200X600 52W 4000K CRI>80 UGR 19 NON DIM	52W	5877lm	113lm/W	7.0kg

\*Delivered lumens from luminaire, including thermal, electrical and optic losses. <sup>~</sup>Tested system powers from luminaire.