



AURORA

A series high-performance suspended luminaire with up to 5520lm output and 134lm/W.

FEATURES:



- 5 year warranty
- Rated life L90/B20 50,000h
- Integral LED driver
- EN AB-47100 Die-cast aluminium body with polyester powder coating
- 99.8% pure aluminium reflector
- Clear tempered glass diffuser
- Adjustable micrometric suspension system with 3.1m steel cable and 2m power supply cable
- CRI>80, MacAdam 3 SDCM

OPTIONS :

- CCT 3000K or 4000K
- CRI>80 as standard, CRI>90 on request
- 30°, 60° or 90° beam angle
- Non-Dim or DALI dimming
- White, black or grey finish
- Stone, elm, mahogany, pin or oak special finish and custom colours are available based on MOQ

APPLICATIONS:

- Retail shops
- Supermarkets
- Foyers
- Offices

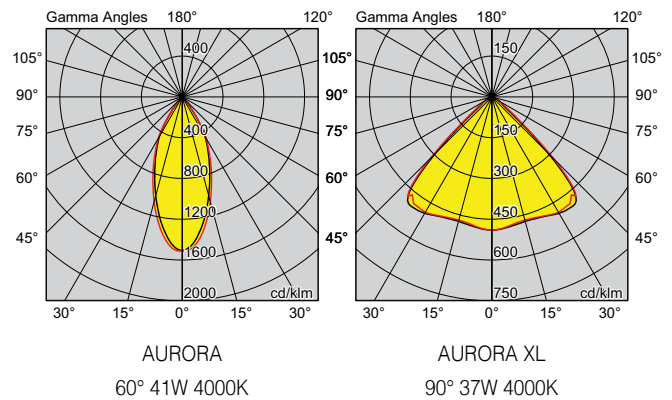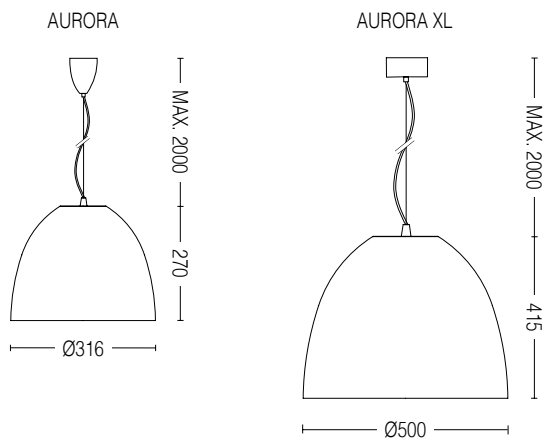

CODE	VERSION	WATTAGE	CCT	CRI	DELIVERED LUMENS*	MASS
5401-LBN-30	AURORA 41W 4000K 30° WHITE NON-DIM	41W	4000K	>80	4435lm	2.2kg
5402-LBN-60	AURORA 41W 4000K 30° BLACK NON-DIM	41W	4000K	>80	4435lm	2.2kg
5401-LBN-60	AURORA 41W 4000K 60° WHITE NON-DIM	41W	4000K	>80	4396lm	2.2kg
5402-LBN-60	AURORA 41W 4000K 60° BLACK NON-DIM	41W	4000K	>80	4396lm	2.2kg
5404-LBN	AURORA XL 37W 4000K 90° WHITE NON-DIM	37W	4000K	>80	4970lm	8.0kg
5406-LBN	AURORA XL 37W 4000K 90° BLACK NON-DIM	37W	4000K	>80	4970lm	8.0kg
5407-LBN	AURORA XL PLUS 43W 4000K 90° WHITE NON-DIM	43W	4000K	>80	5520lm	8.0kg
5409-LBN	AURORA XL PLUS 43W 4000K 90° BLACK NON-DIM	43W	4000K	>80	5520lm	8.0kg

CCT codes: LBC = 3000K / LBN = 4000K

*Delivered lumens from luminaire, including thermal, electrical and optic losses.