

POLE

Architecturally designed die-cast aluminium bollard with 360° symmetric or asymmetric light distribution.



FEATURES:



- 5 year warranty
- 50000 hrs rated life @ L80 B20
- Integrated LED driver
- EN AB-47100 Die-cast aluminium body (low copper content)
- Polyester powder coating with special anti-corrosion treatment (Complies with EN 600068-2-11 Environmental testing - Salt mist)
- 99.8% pure aluminium reflector
- Transparent polycarbonate diffuser UV stabilised
- Silicon rubber gaskets
- Inox screw
- Complete with 0.3m flying lead
- CRI>80, MacAdam 3 SDCM
- IP65, IK07

OPTIONS :

- CCT 3000K or 4000K
- 360° symmetric or asymmetric light distribution
- 700mm or 400mm high
- Marine-Grade treatment
- White, black, grey, anthracite, brown or rusty finish as standard
- Stone, elm, mahogany, pin or oak special finish available based on MOQ

APPLICATIONS:

- Pedestrian areas
- Public or private gardens

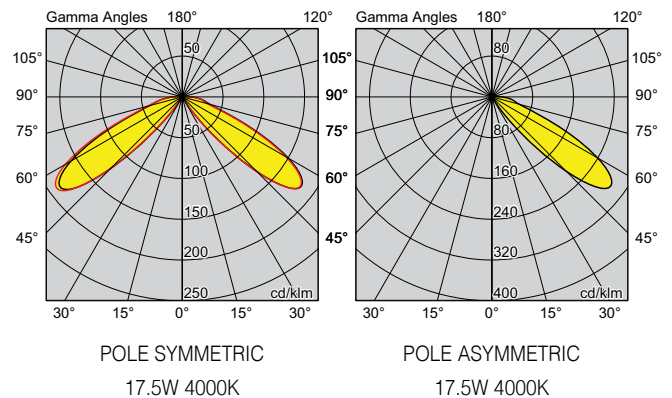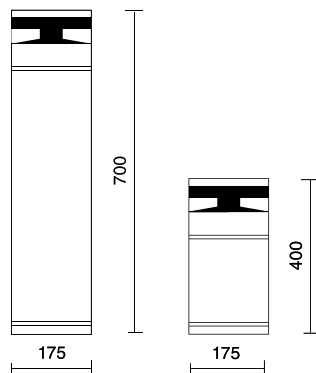

PRODUCT CODE	VERSION	WATTAGE	CCT	CRI	DELIVERED LUMENS*	MASS
E5700-LBN	SYMMETRIC 700MM 17.5W 4000K WHITE	17.5W	4000K	>80	950lm	6.2kg
E5701-LBN	SYMMETRIC 700MM 20.5W 4000K BLACK	17.5W	4000K	>80	950lm	6.2kg
E5702-LBN	SYMMETRIC 700MM 20.5W 4000K GREY	17.5W	4000K	>80	950lm	6.2kg
E5710-LBN	ASYMMETRIC 700MM 20.5W 4000K WHITE	17.5W	4000K	>80	505lm	6.2kg
E5711-LBN	ASYMMETRIC 700MM 20.5W 4000K BLACK	17.5W	4000K	>80	505lm	6.2kg
E5712-LBN	ASYMMETRIC 700MM 20.5W 4000K GREY	17.5W	4000K	>80	505lm	6.2kg
E5705-LBN	SYMMETRIC 400MM 17.5W 4000K WHITE	17.5W	4000K	>80	950lm	4.1kg
E5706-LBN	SYMMETRIC 400MM 20.5W 4000K BLACK	17.5W	4000K	>80	950lm	4.1kg
E5707-LBN	SYMMETRIC 400MM 20.5W 4000K GREY	17.5W	4000K	>80	950lm	4.1kg
E5715-LBN	ASYMMETRIC 400MM 20.5W 4000K WHITE	17.5W	4000K	>80	505lm	4.1kg
E5716-LBN	ASYMMETRIC 400MM 20.5W 4000K BLACK	17.5W	4000K	>80	505lm	4.1kg
E5717-LBN	ASYMMETRIC 400MM 20.5W 4000K GREY	17.5W	4000K	>80	505lm	4.1kg

CCT codes: LBC = 3000K / LBN = 4000K

*Delivered lumens from luminaire, including thermal, electrical and optic losses.