

ROD

Architecturally designed die-cast aluminium bollard with 360° light distribution.



FEATURES:



- 5 year warranty
- 50000 hrs rated life @ L90 B50
- Symmetric 360° light distribution
- Integrated LED driver
- EN AB-47100 Die-cast aluminium body (low copper content)
- Polyester powder coating with special anti-corrosion treatment (Complies with EN 600068-2-11 Environmental testing - Salt mist)
- Transparent polycarbonate diffuser UV stabilised
- Silicon rubber gaskets
- Complete with 1m flying lead
- CCT 4000K
- IP65
- IK07

OPTIONS :

- 1000mm / 500mm high
- Housing for burried installation

APPLICATIONS:

- Pedestrian areas
- Public or private gardens

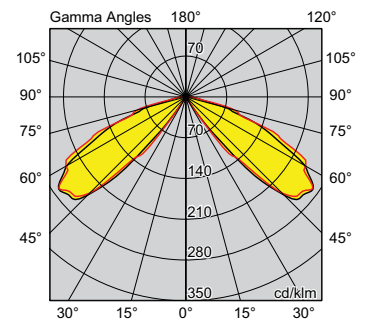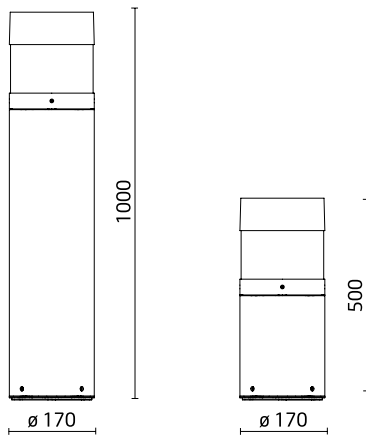

ROD 360° BEAM
17W 4000K

| PRODUCT CODE | VERSION | WATTAGE | CCT | CRI | DELIVERED LUMENS* | MASS |
|--------------|----------------------------------------|---------|-------|-----|-------------------|-------|
| E5775-LBN | 1000MM 17W 4000K ANTHRACITE | 17W | 4000K | >80 | 716lm | 5.5kg |
| E5776-LBN | 500MM 17W 4000K ANTHRACITE | 17W | 4000K | >80 | 716lm | 4.0kg |
| 899 | PE-AD HOUSING FOR BURRIED INSTALLATION | | | | | |
| 645230 | IP68 CONNECTOR Ø FROM 7 TO 10MM | | | | | |

*Delivered lumens from luminaire, including thermal, electrical and optic losses.