

SOLARIS MCL

High quality wall mount LED projector that is designed to illuminate directly or indirectly any type of commercial and retail environments. IP65 rated, ideal for both indoor and outdoor applications.



FEATURES:




- 5 year warranty
- Rated life L90/B20 50,000h
- Integrated LED driver
- EN AB-47100 Die-cast aluminium body (low copper content)
- Polyester powder coating with special anti-corrosion treatment (Complies with EN 600068-2-11 Environmental testing - Salt mist)
- Tilttable optical compartment, 0° to -60° on the vertical axis
- 99.8% pure aluminium reflector
- Clear serigraphed tempered glass
- Silicon rubber gaskets
- CRI>80, MacAdam 3 SDCM
- IP65, IK06

OPTIONS :

- CCT 3000K or 4000K
- Non-Dim or DALI
- Marine-Grade treatment
- White, black, grey, anthracite, brown or rusty finish as standard
- Stone, elm, mahogany, pin or oak special finish available based on MOQ

APPLICATIONS:

- Shopping malls
- Retail spaces
- High ceiling spaces
- Facade

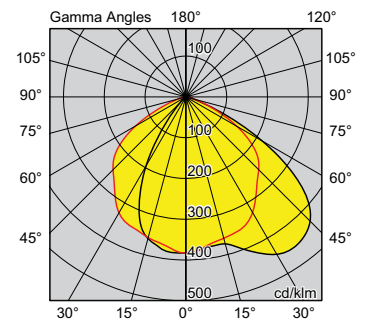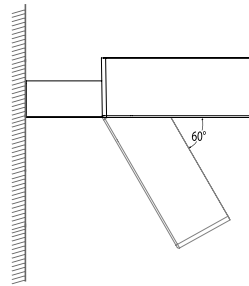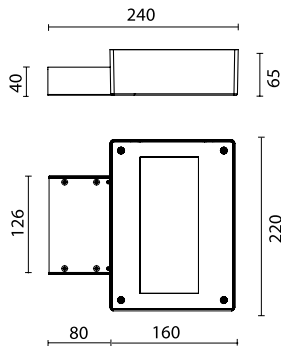

SOLARIS MCL
44W 4000K

CODE	VERSION	WATTAGE	CCT	CRI	DELIVERED LUMENS*	MASS
67950-LBN	40W 4000K WHITE NON-DIM WALL MOUNT	40W	4000K	>80	5648lm	3.0kg
67951-LBN	40W 4000K BLACK NON-DIM WALL MOUNT	40W	4000K	>80	5648lm	3.0kg
67952-LBN	40W 4000K GREY NON-DIM WALL MOUNT	40W	4000K	>80	5648lm	3.0kg
67950-LBN-DA	40W 4000K WHITE DALI WALL MOUNT	40W	4000K	>80	5648lm	3.0kg
67951-LBN-DA	40W 4000K BLACK DALI WALL MOUNT	40W	4000K	>80	5648lm	3.0kg
67952-LBN-DA	40W 4000K GREY DALI WALL MOUNT	40W	4000K	>80	5648lm	3.0kg

CCT codes: LBC = 3000K / LBN = 4000K

*Delivered lumens from luminaire, including thermal, electrical and optic losses.