



## STARGATE

A series slim ring-shaped suspended luminaire that radiates its light directly, indirectly or both. With its harmonic appearance, the glossy satin polycarbonate Halo Lens provides highlight of its own and illuminates its surroundings softly.

### FEATURES:



- 5 year warranty
- Average life L80 B10 50,000 hrs.
- Remote LED driver located in the ceiling box with 2m cable
- Steel trim with epoxy powder coating for inside use
- Glossy satin polycarbonate Halo Lens stands out 5mm from the trim
- Adjustable micrometric suspension system with 2m steel cables and Nylon 66 cable locks
- CRI>80, MacAdam 3 SDCM

### OPTIONS :


- Direct, indirect or both
- CCT 3000K or 4000K
- Non-Dim, 1-10V, Push DIM or DALI dimming
- Size from Ø550-Ø3000mm
- White, black or grey finish as standard
- Custom colours are available based on MOQ

### APPLICATIONS:

- Foyers
- Offices
- Meeting rooms
- Shops

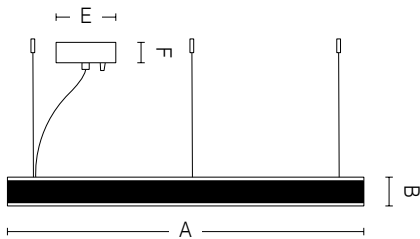

VERSION	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	F (mm)	JOINTS	SUSPENSIONS
550	Ø551	66	Ø437	57	Ø233	50	0	3
750	Ø751	66	Ø637	57	Ø233	50	0	3
950	Ø951	66	Ø837	57	Ø324	50	0	3
1250	Ø1251	66	Ø1137	57	Ø324	50	0	3
2000	Ø2000	90	Ø1840	80	Ø324	50	4	8
3000	Ø3000	90	Ø2840	80	Ø324	50	5	10

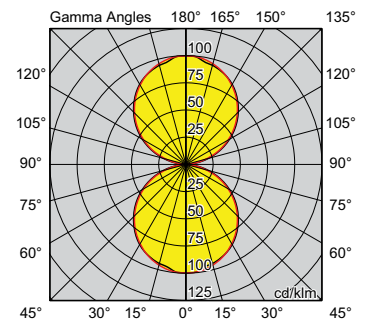

STARGATE 1250  
115W 4000K

PRODUCT CODE	VERSION	WATTAGE	CCT	CRI	DELIVERED LUMENS*	MASS
5600-LBN	550 DIRECT & INDIRECT 4000K WHITE NON-DIM	51W	4000K	>80	4700lm	6.0kg
5601-LBN	550 DIRECT & INDIRECT 4000K BLACK NON-DIM	51W	4000K	>80	4700lm	6.0kg
5605-LBN	750 DIRECT & INDIRECT 4000K WHITE NON-DIM	80W	4000K	>80	6858lm	8.1kg
5606-LBN	750 DIRECT & INDIRECT 4000K BLACK NON-DIM	80W	4000K	>80	6858lm	8.1kg
5610-LBN	950 DIRECT & INDIRECT 4000K WHITE NON-DIM	92W	4000K	>80	8489lm	10.3kg
5611-LBN	950 DIRECT & INDIRECT 4000K BLACK NON-DIM	92W	4000K	>80	8489lm	10.3kg
5615-LBN	1250 DIRECT & INDIRECT 4000K WHITE NON-DIM	115W	4000K	>80	10359lm	13.5kg
5616-LBN	1250 DIRECT & INDIRECT 4000K BLACK NON-DIM	115W	4000K	>80	10359lm	13.5kg
5630-LBN	2000 DIRECT & INDIRECT 4000K WHITE NON-DIM	180W	4000K	>80	14300lm	45.0kg
5631-LBN	2000 DIRECT & INDIRECT 4000K BLACK NON-DIM	180W	4000K	>80	14300lm	45.0kg
5640-LBN	3000 DIRECT & INDIRECT 4000K WHITE NON-DIM	270W	4000K	>80	21080lm	70.0kg
5641-LBN	3000 DIRECT & INDIRECT 4000K BLACK NON-DIM	270W	4000K	>80	21080lm	70.0kg

CCT codes: LBC = 3000K / LBN = 4000K

\*Delivered lumens from luminaire, including thermal, electrical and optic losses.