

## GIOTTO G2 BULKHEAD



### PRODUCT DETAILS:




- Rated life: L80/B10 60000hrs
- LED: CCT 3000K/4000K, CRI>80, 3 SDCM
- Driver: Integral, Non-Dim
- Rating: IP44, IK10, Class I
- Operating temperature: -25°C to +25°C
- Housing: Polycarbonate
- Finishing: White
- Diffuser/Lens: Polycarbonate, Frosted
- Warranty: 5 years

### MADE TO ORDER OPTIONS:

DALI/PUSH/1-10V dimming, Emergency (Compliant to AS/NZS2293)

### APPLICATIONS:

Surface mount, Internal, External  
Hospitality, Logistics, Industry

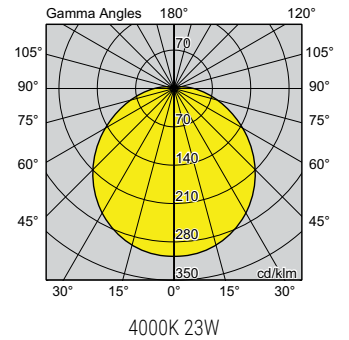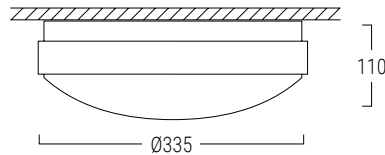

CODE	DESCRIPTION	POWER <sup>~</sup>	LUMENS <sup>+</sup>	EFFICACY	WEIGHT
3034796	4000K CRI>80 NON-DIM	23W	2225lm	97lm/W	1.2kg
3034797	3000K CRI>80 NON-DIM	23W	2111lm	92lm/W	1.2kg
3034796M	4000K CRI>80 NON-DIM EMGY EMGY MODE	23W 3W	2225lm 358lm	97lm/W	1.2kg
3034797M	3000K CRI>80 NON-DIM EMGY EMGY MODE	23W 3W	2111lm 358lm	92lm/W	1.2kg
3034796DALI	4000K CRI>80 DALI	23W	2225lm	97lm/W	1.2kg
3034797DALI	3000K CRI>80 DALI	23W	2111lm	92lm/W	1.2kg

\*Delivered lumens from luminaire, including thermal, electrical and optic losses. <sup>~</sup>Tested system powers from luminaire.