



## GIOTTO G2 BULKHEAD

### PRODUCT DETAILS:




- Rated life: L80/B10 60000h
- LED: CCT 4000K/3000k, CRI>80, 3 SDCM
- Driver: Integral, Non-Dim
- Rating: IP44, IK10, Class I
- Operating temperature: -25°C to +25°C
- Housing: Polycarbonate
- Colour: White
- Diffuser: Polycarbonate Opal
- Warranty: 5 years

### INDENT OPTIONS:

DALI, Emergency (Compliant to AS/NZS2293)

### APPLICATIONS:

Surface mount, Internal, External  
Hospitality, Logistics, Industry

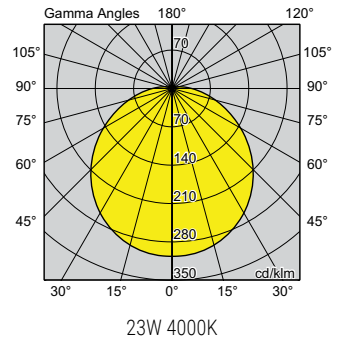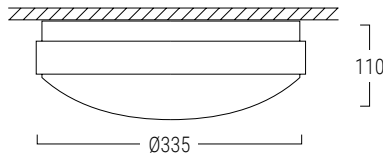

CODE	DESCRIPTION	POWER	LUMENS*	EFFICACY	WEIGHT
3034796	4000K CRI>80 NON-DIM WHITE	23W	2225lm	97lm/W	1.2kg
3034797	3000K CRI>80 NON-DIM WHITE	23W	2111lm	92lm/W	1.2kg
3034796M	4000K CRI>80 NON-DIM EMGY WHITE	23W	2225lm 359lm Emgy.	97lm/W	1.2kg
3034797M	3000K CRI>80 NON-DIM EMGY WHITE	23W	2111lm 341lm Emgy.	92lm/W	1.2kg
3034796DALI	4000K CRI>80 DALI WHITE	23W	2225lm	97lm/W	1.2kg
3034797DALI	3000K CRI>80 DALI WHITE	23W	2111lm	92lm/W	1.2kg

\*Delivered lumens from luminaire, including thermal, electrical and optic losses.